


Imprint must stay 1/8" from inside seals.
Bleed 3/16" past outside seals, half way through spine seals, half way between cavities.
Lines must be at least 1/2 point in width.
White space should be at least 3/4 point.
Text should not be smaller than 6 point, 8 point if serif.
Tints should not be lighter than 10% and not darker than 90%.
Print 85 line screens, 22.5° angle. If large areas, print 65 line screen, 22.5° angle.
Note: all standards are relative and may vary on occasion.

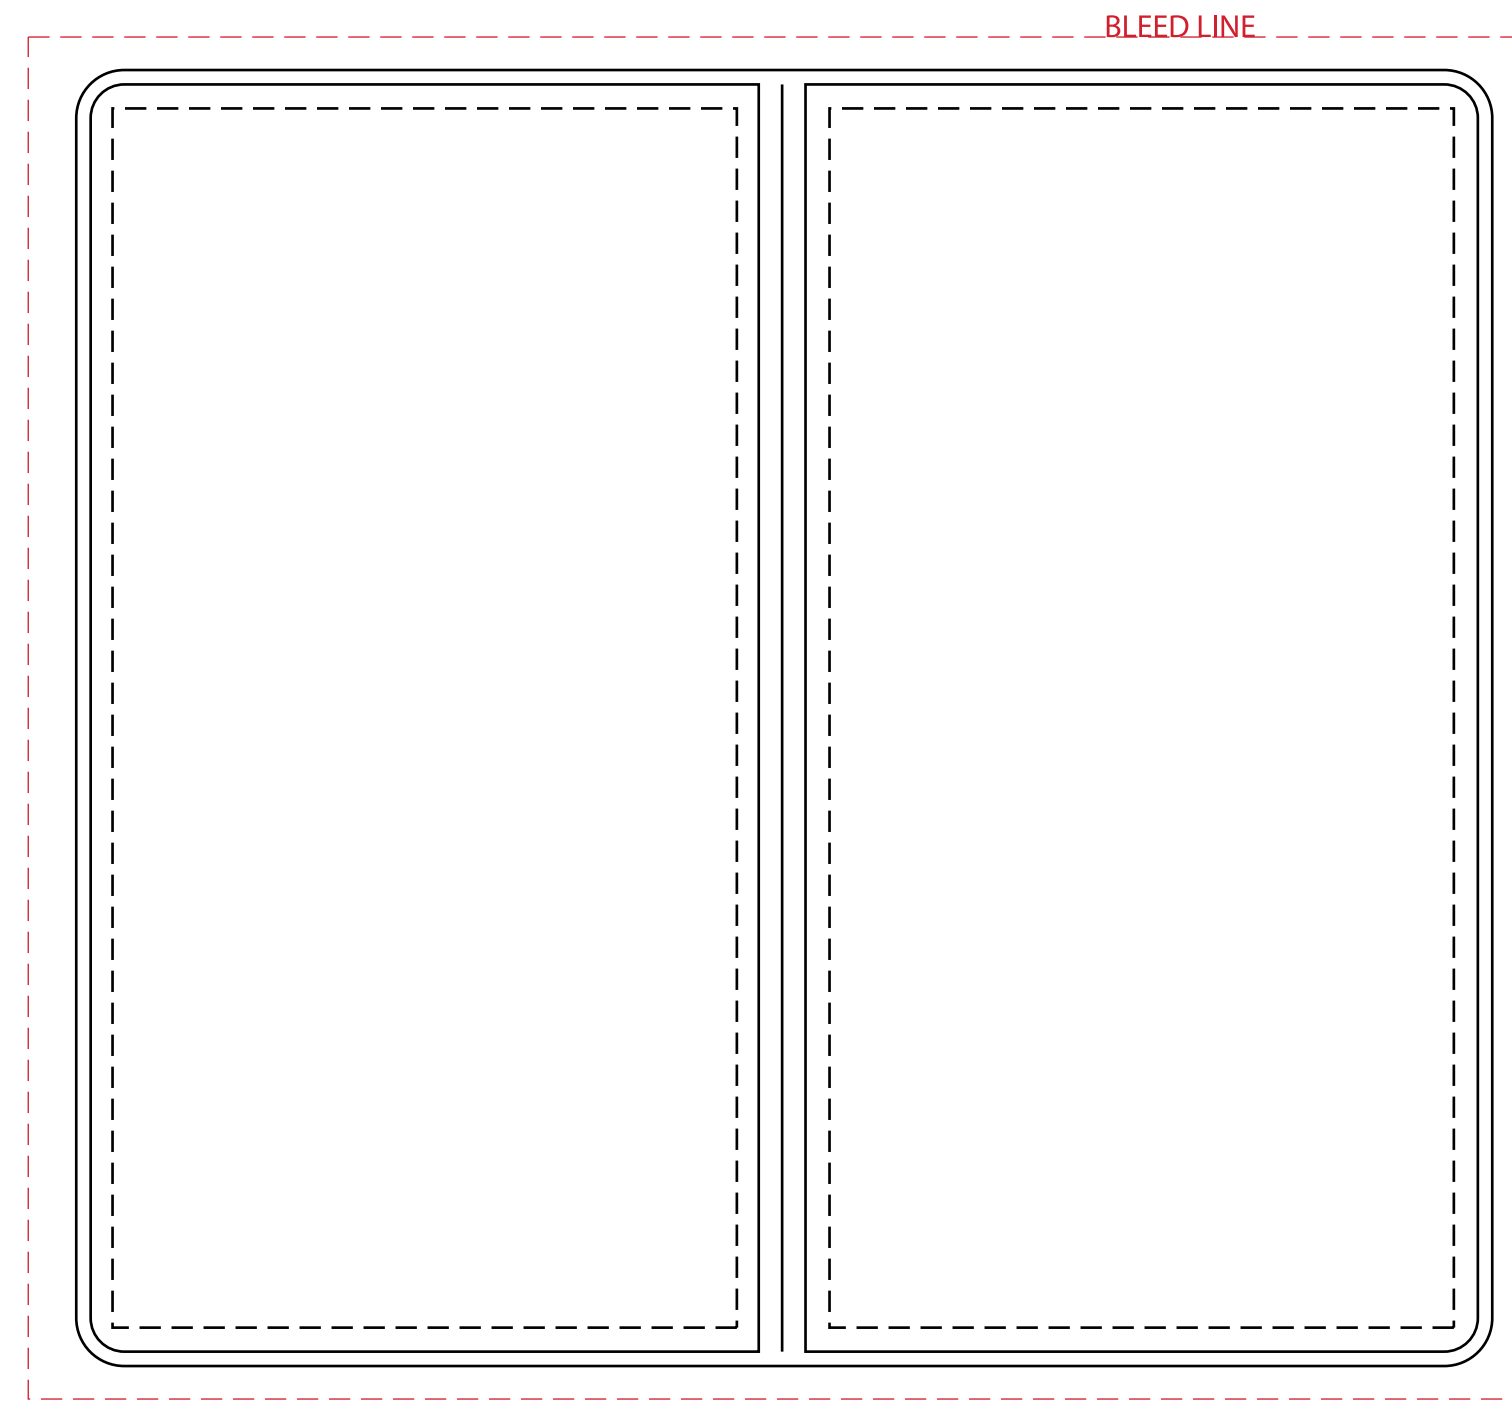

Front

ITEM 1616